

PTL COMPACT™

COMPACT PORTABLE TRAFFIC LIGHT

TYPE-2 PTL TRAFFIC LIGHTS

RMS Type Approval Number for the PTL-300 Controller *ITS-TAN000036*

POWER SPECIFICATIONS:

POWER SUPPLY
ENERGY STORAGE
BATTERY CHARGER

ENDURANCE SPECIFICATION:

OPTICAL SPECIFICATIONS:

CONTROL SPECIFICATIONS:

COMMUNICATION RANGE BETWEEN MASTER-SLAVE

MECHANICAL SPECIFICATIONS:

WEIGHTS:

STAND
CONTROLLER (INC. BATTERY)
LIGHTS
TOTAL
OPTIONAL TARGET BOARD

TRIPOD STAND HEIGHT (FULLY SETUP)

WIND LOADING

PACKING DIMENSION AS SUPPLIED IN CARTON

OPTIONS:

REMOTE USING SMART TERMINAL
RF LONG RANGE REMOTE
BALLASTS (SET OF 3) PER UNIT
VEHICLE DETECTORS
- (FOR DEMAND MODE)
DIRECT LINK (HARDWIRED)
REMOTE CONTROL VIA DS-LIVE
- (USING MOBILE INTERNET)

Nominal 12 Volts. Range 10.8 – 13.8V
12V 40AH AGM Battery – Maintenance Free
240V AC Input – Output 12V 100W

Upto 24 hours operation on a full charge

RED, YELLOW, GREEN ASPECTS
200mm, with Automatic Dimming
YELLOW REAR BEACON

Data Signs PTL-300 Master, Slave & PTL
Remote Operation as per AS 4191-2015 &
MRTS264(QLD) TSI-SP-062,049 and 50

900MHZ ISM SSFH Multiband, 8 channels selectable
up to 800m line of sight

2.6 Kg
9.6 Kg
7.4 Kg
19.6 Kg
2.20 Kg


1480mm diameter footprint
2270mm (not including Target Board)

20 m/s (72 Kph) with 20Kg ballasts placed on each leg

Per unit: Length 1220mm, Width 460mm, Height 500mm




PTL Controller

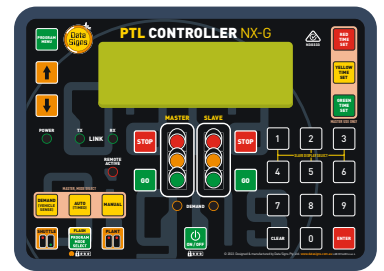

Optional Ballast



Carry bag

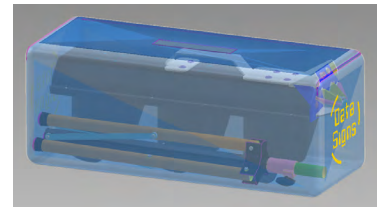

Designed for easy fold away and storage function



Smart Terminal Remote Control



RF Remote Control

OPERATIONAL MODES:

- Gating (single unit use)
- Copy (for gating mode)
- Shuttle
- Plant Crossing
- T-Intersection
- 4-Way Intersection
- 1 to 10 Units Operation using Mobile Internet Mode

SEE NEXT PAGE FOR MORE OPTIONS



Data Signs
AUSTRALIA

Since 1976

datasigns.com
1300 850 785





DATASIGN-PTL-COMPACT

OPTIONS & ACCESSORIES

OPTIONS:

DS-Live™

INTERNET MODE

For situations where line of sight not possible or difficult to obtain.

Must have Mobile coverage at each unit.



*Subscription via web based access.

For all products that connect to the Data Signs Mobile Programming platform DS-Live, and is inclusive for a subscription of 1 year from date of invoice. Subsequent subscriptions are available at the standard rate as published on the DS-Live Website and purchased for each year period per unit.

PTL RF REMOTE LONG RANGE PTL ST-1 BLUETOOTH REMOTE



RF Remote



ST-1 Remote

VEHICLE DETECTORS AND EXTRA ROTATE BRACKET OPTION

Vehicles detectors are available as factory fitted, or as a KIT that can be removed and installed when required.



DIRECT WIRED LOOM ON CABLE REEL



Cable on 300m Reel (max length per reel)
Up to 5 cable reels can be linked providing 1.5Km length

PEDESTRIAN CROSSING

Can be factory fitted or supplied as a KIT that can be installed when required.



RED TIME COUNT DOWN DISPLAY

For Master/Slave operation

Can be factory fitted or supplied as a KIT that can be installed when required.



VMS-I PTL-VMS-INTERGRATION MODULE For PTL to VMS direction messaging controller



www.datasigns.com



1300 850 785